


# Casting Instructions

## OVERHEAD CAST



1. Keep your thumb on the button.
2. Bend your elbow and point the rod behind you. Push the button.
3. Release the button as you whip the rod forward.

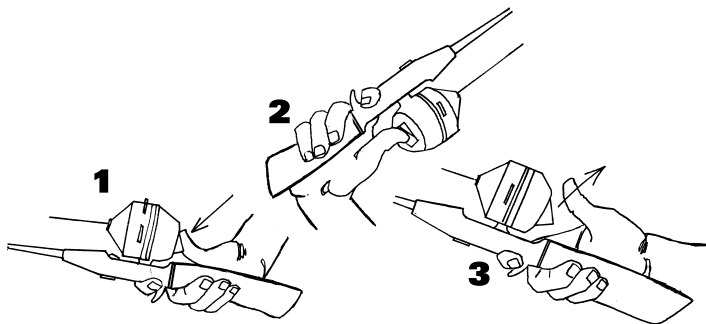

Spincast Owner's Manual

# Pre-Fishing Operation

## FILLING THE SPOOL WITH LINE

Mount reel on rod and thread new line through guides beginning at rod tip. Prior to winding, rotate the handle of the reel and determine which way the spinnerhead is rotating. Lay spool of line on its side or have an assistant hold so the line comes off in the same direction the spinnerhead is turning. Replace front cover and start winding the line under finger tension. The correct amount of line should fill the spool to within 1/8" of the top of the reel spool lip. Stop periodically to see if line is twisting between reel and spool of line. If it is twisting, rotate line spool end for end.

## SETTING THE DRAG (Before Fishing)

The drag system allows line to be pulled from the reel under tension without breaking when a fish strikes or makes a quick run after being hooked. To set the drag, turn the drag knob (located on top of the reel) to the right to increase drag until there is a moderate amount of drag tension when line is pulled from the spool. It's better to start fishing with your drag set too loose than too tight. You can tighten the drag when the fish is on, but if it is too tight, it may break the line. When using lighter line, the drag tension should be set lower. Always test and set the drag before fishing and loosen the drag after fishing (this should be done for each fishing trip).

*NOTE: Drag weight should be set at 1/3 line weight. Example: 12 lb. line should be set at 4 lb. drag. We recommend using a digital scale to measure drag weights.*

# Operation & Maintenance


## LINE TWIST

This is usually caused by improperly installed line, or reeling in against a slipping drag. To correct "line twist", troll line behind boat or play it out in river current and rewind under tension. Never reel in when you hear the drag slipping.

## RECOMMENDED MAINTENANCE

Reels used infrequently should be cleaned and relubricated annually, while reels used several times a week should be cleaned and relubricated monthly. The more frequent or severe the use, the more often and thoroughly a reel should be serviced. After use in saltwater, the reel and spool should be rinsed off with fresh water. If dropped in sand or dirt, the reel should be cleaned and relubricated before using.

*We recommend using Zebco Grease and Zebco Oil to prolong the life of your reel.*

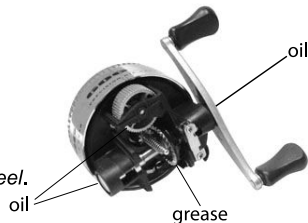

**Zebco, a W.C. Bradley Co. • 6101 East Apache, Tulsa, OK 74115**  
**This product is protected by Patent 4474341 and other Patents Pending.**